Stands

Comparison measuring instruments which ensure high quality, high accuracy and reliability.

SERIES 519 — Transfer Stands

• Transfer Stands are designed for comparison measurements of size using a dial indicator or Digimatic Indicator.



SPECIFICATIONS

М	etric
	Cuit


	•		
Order No.	Stem hole (mm)	Remarks	
519-109-10	ø8, ø9.53	With serrated anvil	

Note 1: Perpendicularity of the stem hole to the anvil is better than 0.4 mm/100 mm.

Note 2: Take note that when mounting high-accuracy Linear Gages (with resolution of 0.1 µm or less) to these stands, accuracy may be affected depending on the perpendicularity of the mounting hole to the top surface of the anvils.

Note 3: Compact dial indicators (bezel ø31, ø36) are not suitable for use with these stands.

DIMENSIONS

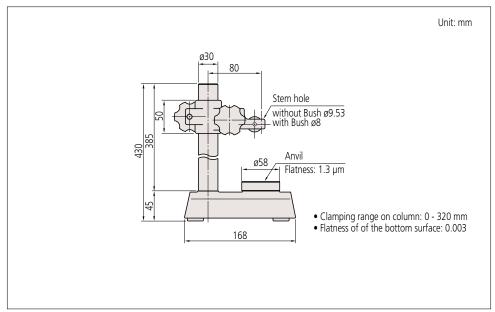

Optional Accessories

101462: Hardened steel serrated anvil (standard accessory)



101461: Hardened steel non-serrated anvil (option)



101463: Hardened steel domed anvil (option)

