



Measurement Data Wireless Communication System Mitutoyo Bluetooth® U-WAVE

U-WAVE now available with Bluetooth® wireless technology







Receiver-less Measurement Data Wireless Communication System

Allows direct measurement data transmission to smartphones, tablets and PCs.





U-WAVEPAK-BM (English version only), the communication software for transferring measurement data to smartphones and tablets is available at app stores for free download.



Available for free from the middle of June 2020



Available for free from the middle of June 2020



U-WAVEPAK-BW, the computer communication software for transferring measurement data to computer software, is available for download from our company's website.

Available for download from April 2020 https://www.mitutoyo.co.jp/contact/products/u-wave/

Google Play and the Google Play logo are trademarks of Google LLC. Apple and the Apple logo are trademarks

Note1: This application operates with Windows Terminal for Windows 10 equipped with the Bluetooth wireless technology function. If your Windows Terminal does not have this function, please purchase a commercially available Bluetooth or receiver. Note2: We cannot quarantee the operation of this application and U-WAVE TCB/TMB with all Bluetooth equipped devices.



Manage Measurement Data Centrally and Wirelessly on a Smartphone, Tablet or PC

Mitutoyo Bluetooth® U-WAVE

U-WAVE-TMB/TCB



More compact and thinner for a better fit with Digimatic gages, and featuring improved operability and performance inherited from its predecessor, U-WAVE-TMB/TCB is now available with Bluetooth® wireless technology. No receiver is required, and one PC can conect up to seven units of Mitutoyo *Bluetooth*® U-WAVE. Dust/water-proof models are also available for arduous shop floor usage.













Major Advantages of Introducing U-WAVE incorporating Bluetooth® wireless technology



Does Not Require a Receiver

Measurement data can be transmitted to PCs, tablets and smartphones without a receiver if they are equipped with Bluetooth® wireless technology!



Cost Reduction Effect

System can be configured at reduced cost, just by connecting to an existing Digimatic gage!



Higher Efficiency

Data can be input by single button operation! Since there is no need for manual input misinput does not occur Efficiency is greatly improved!



Centralized Data Management

Measurement data can be managed centrally!
"Visualization of quality" helps prevent the generation of defective products!

Easy Data Saving

Measurement data can be saved to smartphones and tablets independently of the measurement site!

You can use with confidence since it is labeled with the wireless certification number acquired in the country of purchase.



With Bluetooth® wireless technology for Easy Pairing with Your Digimatic Micrometer or Caliper

U-WAVE-TMB/TCB is compatible with most Digimatic micrometers and calipers.

Refer to our company's website for details on product compatibility.

https://www.mitutoyo.co.jp/eng/support/service/catalog/10/E12000_appendix.pdf



Digimatic micrometers





Digimatic calipers



Digimatic gage, connecting unit and transmitter combinations

Digimatic gage, connecting unit and transmitter combinations								
			Assembled appearance	Connecting unit	Transmitter			
-	For micrometers	Standard	(P) 65	02AZF310	U-WAVE-TMB buzzer type 264-627			
		Water- proof type	(P) 65		U-WAVE-TMB IP67 type dust/water-proof 264-626 IP67			
_	For calipers	Standard		02AZF300	U-WAVE-TCB buzzer type 264-625			
		Coolant- proof type	(P) 67	02AZF310	U-WAVE-TCB IP67 type dust/water-proof 264-624 IP67			



Specifications

Transmitter (Refer to page 5 for combinations.)

Product name	U-WAVE-TMB (for D	igimatic micrometers)	U-WAVE-TCB (for Digimatic calipers)			
Model	U-WAVE-TMB (IP67 type dust/water-proof)	U-WAVE-TMB (buzzer type)	U-WAVE-TCB (IP67 type dust/water-proof)	U-WAVE-TCB (buzzer type)		
Order No.	264-626	264-627	264-624	264-625		
Protection level	IP67	N/A	IP67	N/A		
Data reception indication	LED	LED, buzzer	LED	LED, buzzer		
Power supply	Lithium battery CR2032×1					
Battery life	Approx. 1 year under normal conditions of use, but varies according to usage.					
Mass	18 g					
Appearance	MEDICITY O	Maladoya An emineral real	AREADYPE May year and the	Metadaya Lasaren esp		
External dimensions	12.		26	(mm)		

Connecting unit (Refer to page 5 for combinations.)

Product name	Order No.	Protection level	Mass	Appearance	External dimensions
Connecting unit (for dust/water-proof type)	02AZF310	IP67	6 g		27.15 (mm) (961) 27.15 (27.15)
Connecting unit (for standard type)	02AZF300	N/A	6 g		26.25 (mm) (961) 26.25 (mm) 26.25 (mm)

Wireless Communication Specifications

Wireless communication	Bluetooth 4.2 Low Energy		
Wireless communication distance	Approx. 16 m (line of sight) Approx. 10 m (in a factory environment)		
Transmission output	3.2 mW (5 dBm) or less (Class2)		
Modulation method	FH-SS (Frequency-hopping spread spectrum)		
Communication frequency	2.4 GHz band		

Note 1: To use U-WAVE-TMB/TCB, conformity to the radio law of each country is required. Please contact your dealer or nearest Mitutoyo sales office.

 $Note\ 2: U-WAVE-TMB/TCB\ is\ not\ compatible\ with\ U-WAVE\ fit,\ for\ which\ communication\ specifications\ are\ different.$



Refer to the U-WAVE fit Brochure (No. E12000) for more details. https://www.mitutoyo.co.jp/eng/support/service/catalog/10/E12000.pdf




Optional Products

Application system for a PC

Product nam	e Model No.	Compatible OS: Windows	Compatible Excel version	Part No.	Appearance
USB-ITPAK	USB-ITPAK V2.1	10 (64 bit)	2016 (The operation with Excel for MAC OS is not guaranteed.)	06AFM386	LIGHTIMA LIGHT CONTRACT CONTRA

A USB dongle must be connected to the PC running the software.

Configuring the measurement network system MeasurLink based on U-WAVE-TMB/TCB

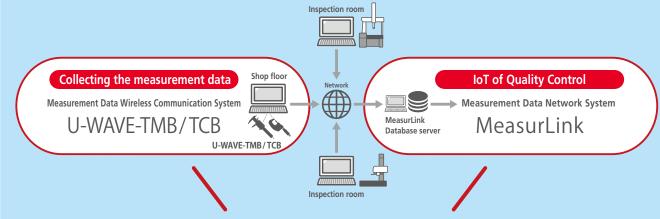

Achieve "Visualization of Quality"



With MeasurLink®

MeasurLink is an IoT platform for quality management that realizes "Visualization of Quality" by enabling real-time data collection from networked Digimatic gages and global control and analysis. U-WAVE supports MeasurLink as an infrastructure that collects and controls data.

Preventing defectives

network and performs statistical process control (SPC to warn of possible generation of defectives.

Diagnosis by data analysis

Checking measurement results by accessing the data base and performing various analyses help investigate and resolve process performance concerns.

Simply start achieving IoT

network can be configured in steps to simply start IoT of Quality Control.



Whatever your challenges are, Mitutoyo supports you from start to finish.

Mitutoyo is not only a manufacturer of top quality measuring products but one that also offers qualified support for the lifetime of the equipment, backed up by comprehensive services that ensure your staff can make the very best use of the investment.

Apart from the basics of calibration and repair, Mitutoyo offers product and metrology training, as well as IT support for the sophisticated software used in modern measuring technology. We can also design, build, test and deliver bespoke measuring solutions and even, if deemed cost-effective, take your critical measurement challenges in-house on a sub-contract basis.

Note: Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

MITUTOYO and MiCAT are either registered trademarks or trademarks of Mitutoyo Corp. in Japan and/or other countries/regions. Other product, company and brand names mentioned herein are for identification purposes only and may be the trademarks of their respective holders.



www.mitutoyo.com.sg | www.mitutoyo.com.my www.mitutoyo.co.th | www.mitutoyo.co.id www.mitutoyo.com.vn | www.mitutoyo.com.ph

Small Tools Authorized Distributor

Mitutoyo

Mitutoyo Asia Pacific Pte. Ltd.

Company Reg No. 197800892N

24 Kallang Avenue, Mitutoyo Building, Singapore 339415

Tel: (65) 6294 2211 Fax: (65) 6299 6666 E-mail: mapsq@mitutoyo.com.sq

Mitutoyo (Malaysia) Sdn. Bhd. Mah Sing Integrated Industrial Park,

4, Jalan Utarid U5/14, Section U5, 40150 Shah Alam, Selangor, Malaysia Tel: (60) 3-7845 9318 Fax: (60) 3-7845 9346

E-mail: mmsb@mitutovo com my

Penang Branch Tel: (60) 4-641 1998 Fax: (60) 4-641 2998

Johor Branch

Tel: (60) 7-352 1626 Fax: (60) 7-352 1628

Mitutoyo (Thailand) Co., Ltd. 76/3-5, Chaengwattana Road, Kwaeng

Anusaowaree, Khet Bangkaen, Bangkok 10220, Thailand Tel: (66) 2080 3500 Fax: (66) 2521 6136 E-mail: office@mitutoyo.co.th

Chonburi Branch
Tel: (66) 2080 3563 Fax: (66) 3834 5788 ACC Branch

Tel: (66) 2080 3565

PT. Mitutovo Indonesia

Jalan Sriwijaya No.26 Desa cibatu Kec. Cikarang Selatan Kab. Bekasi 17530, Indonesia Tel: (62) 21-2962 8600 Fax: (62) 21-2962 8604 E-mail: ptmi@mitutoyo.co.id

Mitutovo Vietnam Co., Ltd. 1st & 2nd Floor, MHDI Building,

No. 60 Hoang Quoc Viet Road, Nghia Do Ward, Cau Giay District. Hanoi, Vietnam Tel: (84) 24-3768 8963 Fax: (84) 24-3768 8960 E-mail: mvc@mitutoyo.com.vn Ho Chi Minh City Branch Tel: (84) 28-3840 3489 Fax: (84) 28-3840 3498

E-mail: mvc@mitutoyo.com.vn

Mitutoyo Philippines, Inc.

Unit 1B & 2B LTI Administration Building 1, Annex 1, North Main Avenue, Laguna Technopark, Biñan, Laguna 4024, Philippines Tel: (63) 49-544 0272 Fax: (63) 49-544 0272 E-mail: mpi@mitutoyo.com.ph