




DS-990

Fully Waterproof Weighing Scale

Super anti-corrosion performance with highest class
stainless steel material SUS316L


Full hermetical stainless steel loadcell

Built-in rechargeable battery and AC adaptor

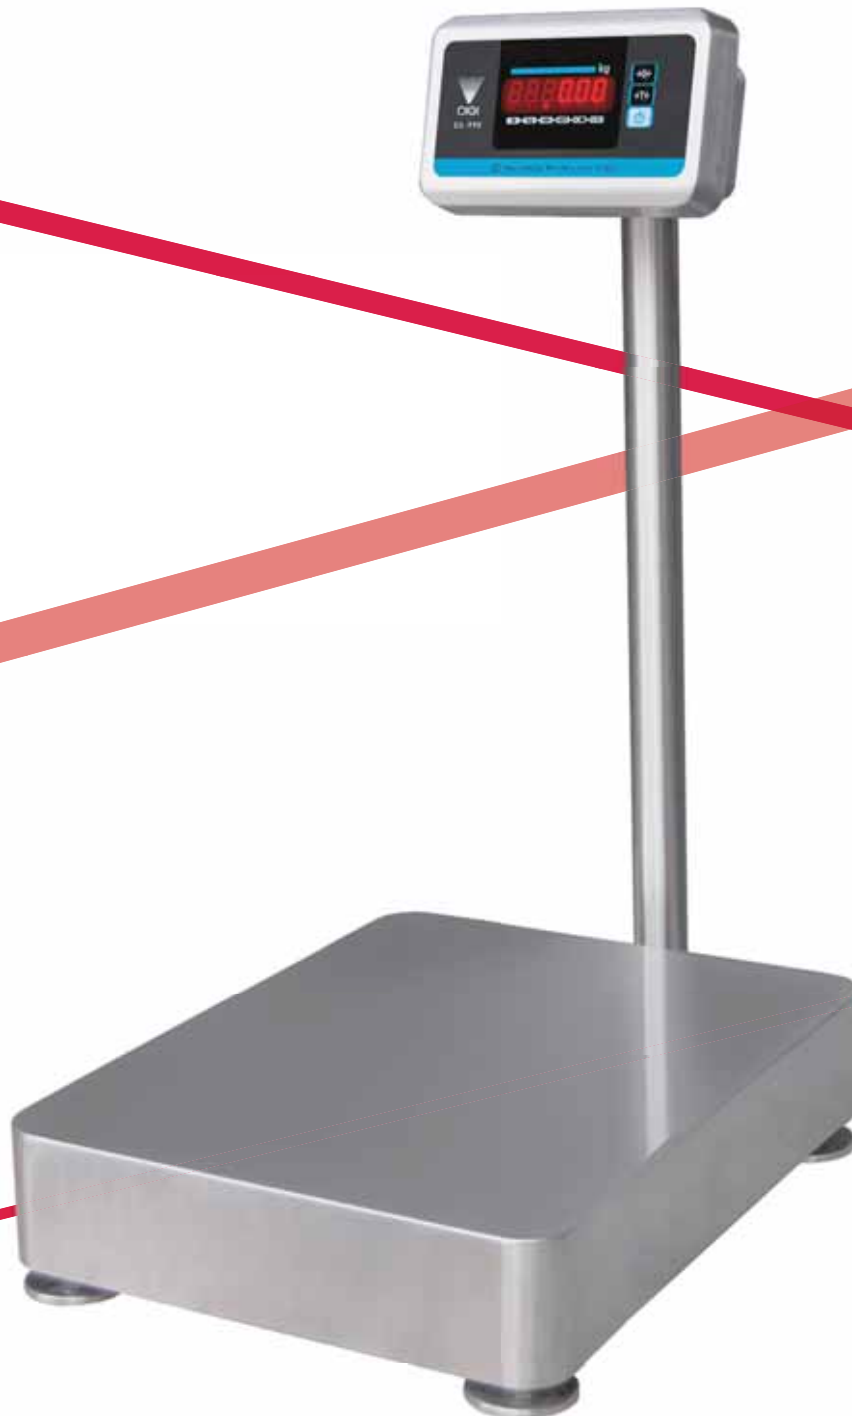

***Searching for
a New Balance***

External Dimensions (mm)

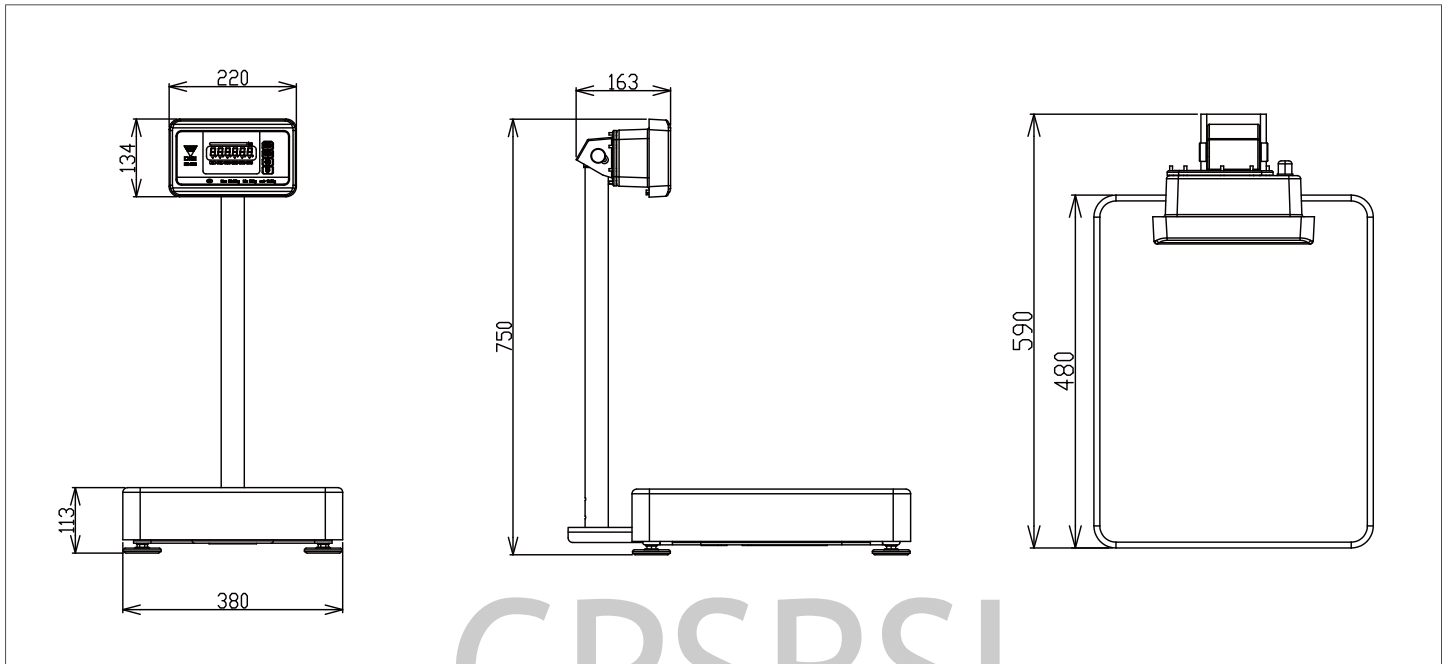

CPSRSL

Basic Specifications

Model	DS-990
Capacity and Interval	30kg/10g 60kg/20g 150kg/50g
Display	High brightness LED display Weight Display: 6 digits. Decimal point: Selectable by SPEC
Dimensions	Platform size : 480(W) x 380(D) x 113(H) mm Overall size: 590(W) x 380(D) x 750(H) mm
Power Source	AC 240/230/220V, 117/100V DC 6V 2.8Ah rechargeable battery (optional) Rechargeable Battery (optional) backup for 40 hours of continuous usage (when Dimmer Level is set to '2' or below). Charging condition(800mA ,12-14 hours)
Operating Temperature	-10 ~ +40 (OIML)
Operating Humidity	15% ~ 85% RH
Power Consumption	18W when using AC power 3W when using rechargeable battery
Waterproof rating	platform:IP69K console:IP68

*Specifications are subject to change without prior notice.



Capacity and Interval	30kg/10g, 60kg/20g, 150kg/50g
Platter size	480(W) x 380(D) x 113(H) mm
Load cell	Full hermetical stainless steel loadcell
Recommended excitation voltage	1 ~ 12V DC
Input impedance	380 ±15 ohm
Output impedance	350 ±10 ohm
Insulation resistance	1000M ohm or more
Zero balance	Within ±30%R.O.
Load cell wire length	3m

CPSRSL

10 Bis rue des Colons

97450 SAINT LOUIS

Tél : 0262 34 60 54

Fax : 0262 57 32 56