

Inside Micrometers

For easy and accurate measurement of inside size and diameter

Inside Micrometers SERIES 345, 145 — Caliper Type

MeasurLink[®] ENABLED
Data Management Software by Mitutoyo

- Caliper type inside micrometer equipped with round pin or anvil type jaws, according to model.
- Carbide measuring faces.
- Equipped with a constant measuring-force device.
- Optional Setting Rings (nominal size below 300 mm), CERA Inside Micro Checker (more than 25 mm) and Gauge Block Accessory Sets are available as reference gages for datum adjustment (refer to page C-47, C-26, and E-17 to E-20 for details).



345-250-30



145-185



145-187

SPECIFICATIONS

Metric					
Order No.	Range (mm)	Resolution (mm)	Accuracy* (μm)	Jaw	Mass (g)
Digimatic (LCD)					
345-250-30	5 - 30	0.001	±5	Pin	320
345-251-30	25 - 50		±6	Anvil	325

Inch/Metric					
Order No.	Range (in)	Resolution	Accuracy* (in)	Jaw	Mass (g)
Digimatic (LCD)					
345-350-30	0.2 - 1.2	0.00005 in/ 0.001 mm	±0.00025	Pin	320
345-351-30	1 - 2		±0.0003	Anvil	325

* Excluding quantizing error

Note: For the functions, refer to **293** Series with SPC data output on page B-8.
This model is NOT water-proof. Also, the origin setting is the free preset type.

Metric					
Order No.	Range (mm)	Graduation (mm)	Accuracy (μm)	Jaw	Mass (g)
Analog					
145-185	5 - 30	0.01	±5	Pin	130
145-186	25 - 50		±6	Anvil	140
145-187	50 - 75		±7	Anvil	160
145-188	75 - 100		±8	Anvil	180
145-189	100 - 125		±9	Anvil	210
145-190	125 - 150			Anvil	230
145-191	150 - 175		±10	Anvil	250
145-192	175 - 200			Anvil	270
145-217	200 - 225		±11	Anvil	310
145-218	225 - 250			Anvil	330
145-219	250 - 275		±12	Anvil	350
145-220	275 - 300			Anvil	370

Inch					
Order No.	Range (in)	Graduation (in)	Accuracy (in)	Jaw	Mass (g)
Analog					
145-193	0.2 - 1.2	0.001	±0.00025	Pin	130
145-194	1 - 2		±0.0003	Anvil	140
145-195	2 - 3		±0.00035	Anvil	160
145-196	3 - 4		±0.0004	Anvil	180


Note: The minimum pitch circle measurement is ø5 mm with pin types (145-185 and 345-250-30).

MeasurLink[®] ENABLED
Data Management Software by Mitutoyo

Products equipped with the measurement data output function can be connected to the measurement data network system MeasurLink (refer to page A-5 for details).



Accessories for 145-185/186/193/194 (optional)

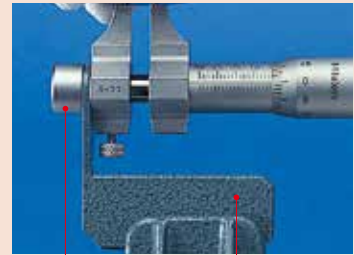

Cap (300401) Holder (300400)

Note: This instrument requires the cap and the holder for mounting on a micrometer stand.

Note: It may not be applicable to a custom specification.

Technical Data

- Battery and Scale Type (for 345-250-30/251-30/350-30/351-30) SR44 (1 pc), **938882**, for initial operational checks (standard accessory)
- Battery life: Approx. 2.4 years under normal use
- Scale type: Electromagnetic induction-type rotary encoder

Optional Accessories

Refer to page A-25 for details.

- Connecting cables for Input Tool/Digimatic Mini-Processor, etc.
1 m: **05CZA662**
2 m: **05CZA663**
- **USB** Input Tool Direct (2 m): **06AFM380B**
- Connecting cables for **U-WAVE-T**
For standard (160 mm): **02AZD790B**
For foot switch: **02AZE140B**

DIMENSIONS

Unit: mm

