




www.tuv.com  
ID 000045042



### Technical Data

- Accuracy: Refer to the list of specifications. (excluding quantizing error for Digimatic models)
- Resolution\*<sup>1</sup>: 0.01 mm or 0.0005 in/0.01 mm
- Graduation\*<sup>2</sup>: 0.05 mm
- Display\*<sup>1</sup>: LCD
- Scale type\*<sup>1</sup>: ABSOLUTE electromagnetic induction linear encoder
- Max. response speed\*<sup>1</sup>: Unlimited
- Battery: SR44 (1 pc), **938882**, for initial operational checks (standard accessory)
- Battery life\*<sup>1</sup>: Approx. 5 years under normal use
- Dust/Water protection level\*<sup>1</sup>: IP67 (IEC 60529)\*<sup>3</sup>
- \*<sup>1</sup> Digimatic models
- \*<sup>2</sup> Analog models
- \*<sup>3</sup> Rustproofing shall be applied after use if caliper was in contact with coolant.

### Optional Accessories for Digimatic Models

For details, refer to page A-27.

- Connecting cables for **IT/DP/MUX**
- **05CZA624**: SPC cable with data button (1 m)
- **05CZA625**: SPC cable with data button (2 m)
- USB Input Tool Direct
- **06AFM380A**: SPC cable for **USB-ITN-A** (2 m)
- Connecting cables for **U-WAVE-T**
- **02AZD790A**: SPC cable with data button (160 mm)
- **02AZE140A**: SPC cable for foot switch


### Wireless Data Output **U-WAVE fit**

- **U-WAVE-TC**: **264-620** (IP67 type)  
**264-621** (Buzzer type)
- **U-WAVE-TCB Transmitter (Mitutoyo Bluetooth<sup>®</sup> U-WAVE)**  
**264-624** (IP type)  
**264-625** (Buzzer type)  
Refer to page A-15 for details.
- Connecting unit for **U-WAVE-TC/TCB**  
**02AZF310** (IP67 type)  
Note: IP67 model is water/dust-proofed suitable for the factory floor.  
Buzzer type is not water/dust-proofed.  
Refer to pages A-16 and A-18 for details.

## Blade Type Caliper SERIES 573, 536 — ABSOLUTE Digimatic and vernier types


MeasurLink<sup>®</sup> ENABLED  
Data Management Software by Mitutoyo

- The thin blade-type jaws fit into very small grooves and make previously difficult outside measurements far easier to obtain.
- The outside measuring faces are carbide tipped.
- Allows step measurement.
- Digimatic models are IP67 Absolute type. Slider action is smooth, firm and comfortable.
- Allows integration into statistical process control and measurement systems for models with measurement data output connector. (Refer to page A-3.)

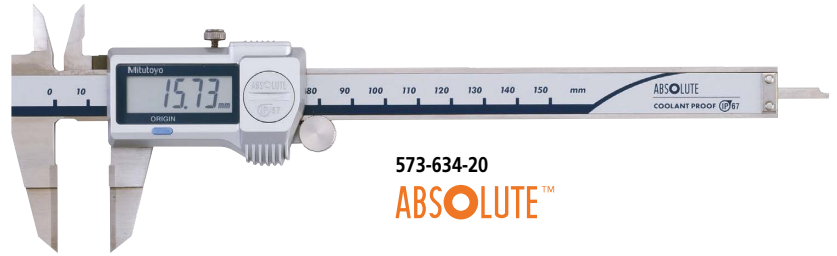

573-634-20

ABSOLUTE™

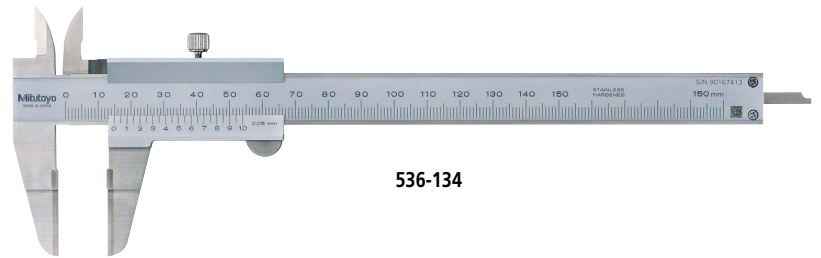

536-134

### SPECIFICATIONS

Metric	Digimatic model	
Order No.	Range (mm)	Accuracy (mm)
<b>573-634-20</b>	0 - 150	±0.02
<b>573-635-20*</b>	0 - 150	±0.02

\* Without thumb roller

Metric	Analog model	
Order No.	Range (mm)	Accuracy (mm)
<b>536-134</b>	0 - 150	±0.05
<b>536-135</b>	0 - 200	±0.05
<b>536-136</b>	0 - 300	±0.08

Inch / Metric	Digimatic model	
Order No.	Range (in)	Accuracy (in)
<b>573-734-20</b>	0 - 6	±0.001

### DIMENSIONS

**Analog model**

**Digimatic model**

Unit: mm

Range (mm)	A	B	C	D	d	e	H	t
0 - 150	17	21.5	17	40	20	0.75	16	3
0 - 200	20.5	25	20.5	50	25			
0 - 300	22	27.5	22	64	30	1	20	3.8