





Dial gauge always stays in front of the operator.

Unique centering tool for lathes with superior visibility.

- Fine adjustment mechanism aids easy centering (2mm adjustment amount).
- Unrestricted mounting positions with a magnet base.
- Compact design of 90mm total length, ideal for small lathes.




Model **CTL-90**

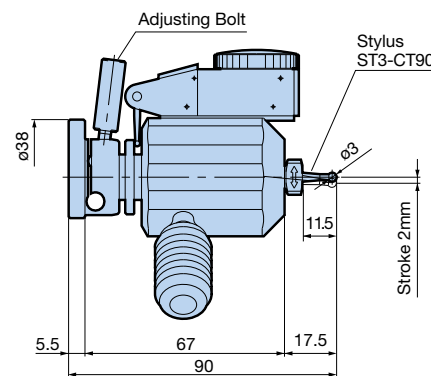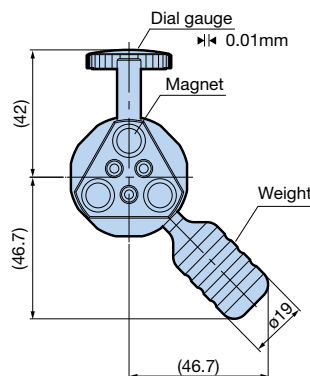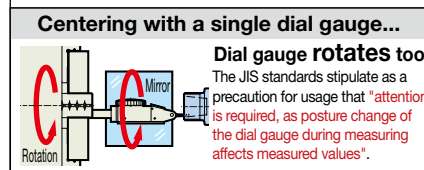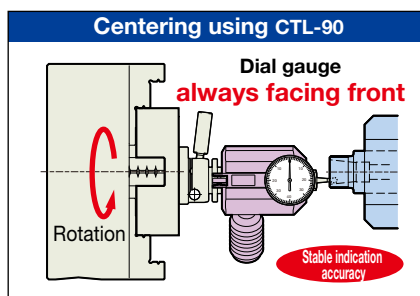

Main Specifications

Min. scale	0.01mm
Max. operating spindle speed	50min ⁻¹
Stroke amount	2mm
Weight	0.4kg
Standard accessory	Stylus: ST3-CT90 (tip ruby)

<Long stylus> Optional Accessory for CTL-90




Model **ST3-CT90L**


Tip: Ruby

Quick detection of the cutting edge position.

- Effective in reducing setup time for NC Lathes.
- Detectable with various tool bits for external, internal and face turning.

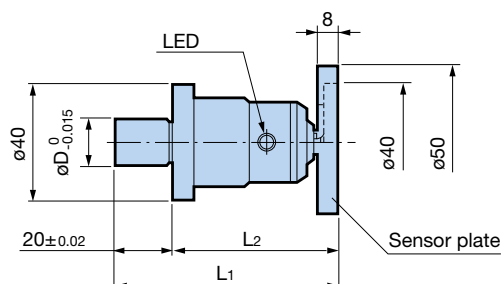


Model	øD	L ₁	L ₂	Repeatability	Battery
LM-15	15	75	55	±2 μ	BR425
LM-30	30	65	45		SR44 x 2

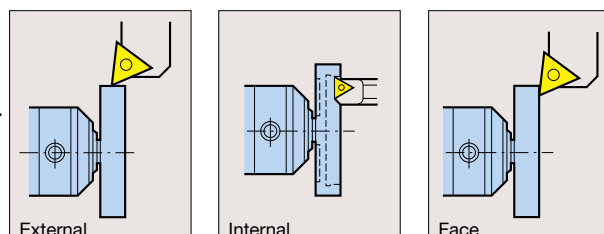

Clamp the øD section of LATHE MASTER with chuck jaws. LED illuminates when the tip of the tool touches the sensor plate.

Collar Set <Optional>

If the chuck jaw diameter does not fit, an optional collar set is available.

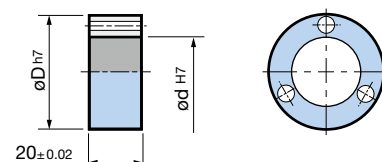

Model	Inner diameter ød	Outer diameter øD
LM15CS	15	20, 25, 30 (1 pc each)
LM30CS	30	35, 40, 45, 50 (1 pc each)



Caution

- Machine and tools must be electro-conductive for measurement.